


FW7930-GXM

3MP Global Shutter Bullet

FW7930-GXM is a high quality IR bullet IP camera which is equipped with 3.19MP(effective pixel) Global Shutter CMOS image Sensor. With the highest sensitivity sensor, it is especially superior in low light condition. As it supports simultaneous H.265, H.264 and MJPEG Video Compression, less network bandwidth and storage space required. It also delivers high quality video image at 30 fps @ 3MP (2048X1536) in progressive mode.

Key Features

- Ambarella platform – Backdoor Issue free
- 1/1.8" 3.19MP Sony IMX265 Global Shutter CMOS sensor
- Strobe driven power LED
- Good for ANPR or LPR
- 3.6~11.0mm Motorized Auto-Focus Lens
- 4 Power IR LEDs up to 50M
- Quadruple Stream (H.265, H.264, M-JPEG, JPEG)
- Max. 30fps @ 3MP (2048x1536)
- Four Independent Image mode
- Night Color level adjustment (B/W, 5 steps)
- Three Color mode
- Shutter limit (Min./Max.) setting
 - Good for the better night time moving object image
 - To avoid saturation under strong back light or IR reflection
- OnVIF (Profile S) standard
- Remote Web configuration of IR ON/OFF and CDS sensitivity

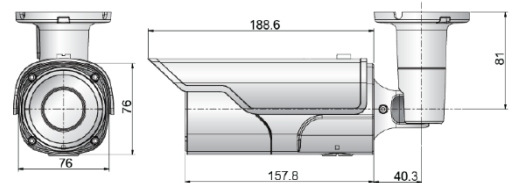

Tech Notes

Global shutter cameras for LPR

High-speed, smear-free still image capture is the hallmark of global shutter image sensors. Applications such as traffic management, metrology and robotics inspection all need to image fast-moving objects without smear or distortion. These imagers have the ability to electronically shutter itself and "stop the action."

IP filtering

The IP filtering enables you to control what IP traffic you want to allow into and out of your IP camera. Use IP filtering to help protect your IP camera by filtering access from other IP address set for filtering.

FW7930-GXM

Technical Specifications

Camera	
Imaging Sensor	1/1.8" 3.19MP Sony IMX265 Global Shutter CMOS
Lens	3.6~11.0mm Motorized Auto-Focus
Day & Night	True Day & Night (ICR)
Min. Illumination	Color : 0.05lux (0.02 lux DSS ON), B&W : 0 lux (IR On)
Video Stream	
System	Ambarella 32bit Embedded Linux 256Mbyte SDRAM, 128Mbyte NAND Flash
Compression	H.265, H.264, M-JPEG, JPEG still image
Resolution	2048x1536, 1920x1080, 1280x720, 704x480, 640x352, 320x176, 160x96
Frame rate	30fps/25fps @ 3MP
Video Stream	Quadruple Streaming, selectable : H.265/H.264/MJPEG, Frame rate, Bitrate, ACBR/AVBR/VBR/CBR, GOP
Video Setting	
Motion Detection	4 Areas
Audio Detection	Enable (sensitivity setting) / Disable
Privacy Masking	8 Areas
Video Analytics	Optional (Face Detection, Tampering, Tripwire etc.)
Smart Video	ROI (Region of Interest)
Independent Image Mode	Default / Night / DI / Motion independent mode set
AE Metering	Spot / Center / Average / Center Flip
Shutter control	Manual / Auto
Manual Shutter Control	1/30 ~ 1/32,000 Min/Max setting
Max AGC Gain	0~72
Sense Up Level	OFF / 1 / 2 three steps
Back Light Compensation	Enable/Disable
Auto Exposure Weight	25 ~ 400
Strobe Delay	-50 ~ 50
Image Filter	Brightness / Contrast / Hue / Saturation / Sharpness
WDR Weight	Low / Middle / High
Image Adjustment	Sharpness, Gamma
White Balance	Auto / 10 customized mode
DNR	3 DNR 0 ~ 11
Day & Night Control	Color, B&W, Auto(Night B/W, Night color 10 steps)
Night Color Mode	OFF/1~10 10 steps
Image Direction	Vertical Flip / Horizontal Flip / Corridor Mode
3 Color Mode	Default / Standard / Vivid
Network	

Security	IP Filtering, HTTPS, Encrypted & Basic Authentication, Management White List
Supported protocols	HTTP, RTP/RTSP(Uni/Multicast), TCP/IP(v4/v6), UDP, FTP, Telnet, HTTPS, RARP, SNMP, DHCP, NTP, SMTP client, uPnP&etc
DDNS	www.ipcctvdns.com
Interface	RJ45 Ethernet 10/100Mbps
System Integration	
Programing Interface	SDK, OnVIF Profile S
Video Analytic	Motion detection. Optional: ROI, Tripwire, Tampering, Face Detection
Triggering Event	Motion detection, triggering DI, triggering serial input, connected/ disconnected, boot finished
Action on Event	Pre-alarm & Post-alarm buffer. Upload FTP, Email notification, FCM Google notification
Connection	Alarms : Optional 1 in and 1 out CVBS : Optional 1 BNC
Illuminator	
Type	Strobe Driven Power IR LED
Distance	Max. 50Meter
Onboard storage	
Type	Optional 1 MicroSD Slot
Recording	Always, Schedule, Event, Schedule & Event
Playback	Internet Explorer, FlexWATCH NVR/ CMS/ Mobile App
Audio	
Codec	G.711 / AAC / SpeeX
Audio stream	2 way
Connection	Optional, 1 Audio In / 1 Audio Out
General	
Case	Metal
Power Supply	SMPS, DC12V / 3A PoE : IEEE 802.3at
Power Consumption (Max.)	5.52W @ Shutter speed 1/500sec 4.80W @ Shutter speed 1/1,000sec
Operating Environment	-20°C ~ +60°C, 10% ~ 90% RH
Dimension	85φ x 280(L) x 80(H) mm
Weight	About 1250g without Power Supply
Approval	KC, CE, FCC, RoHS, IP67
Accessories	-
Bundle Software	IP Installer, SMVP, Smart NVR Lite